

**SPECIFICATIONS**

**EXITS**

**HOUSING**

- Single piece, ABS plastic housing
- Field Selectable red or green, single or double face plates
- White finish standard
- Chevron indicators are field selectable

**ELECTRICAL**

- Dual 120/277V
- Consumes 2.6W power
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 40°C (32°F - 104°F)

**ILLUMINATION**

- Ultra bright, energy efficient white LEDs
- Single and double faced red and green panels provided standard

**BATTERY**

- Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

**MOUNTING**

- Wall or ceiling mount

**CODE COMPLIANCE**


- cULus Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes

**WARRANTY**

- 5 Year



**EDGPE**  
**Universal Thermoplastic**  
**Edgelit**

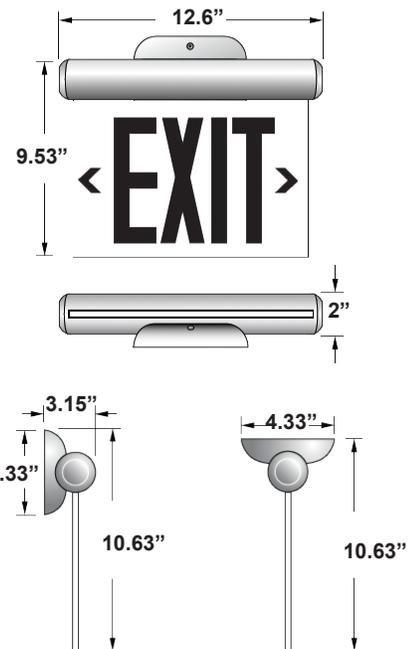

**ORDERING INFORMATION**

CATALOG#	Description
EDGPEU2W	Universal Single/Double, Red or Green, White Housing, AC Only
EDGPEU2W-EM	Universal Single/Double, Red or Green, White Housing, NiCad Battery

**OPTIONS (Factory Installed)**

SWXE - Special Wording (prefix to part number)