

SPECIFICATIONS

HARSH ENVIRONMENT

HOUSING

- Fiberglass reinforced polycarbonate construction
- Gray finish

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Bi-Color LED indicator light alerts to battery condition (Green-normal; Red-check)
- Operating Temperature: 0°C - 50°C (32°F - 122°F)
- Cold Weather option: -20°C - 50°C (-4°F - 122°F)

BATTERY

- Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Offers 7.8W remote capability standard

ILLUMINATION

- 3.6W MR16 LED lamp heads standard (219 Lumens/head)
- Adjustable heads

MOUNTING

- Universal knockout pattern on back with gasket for watertight for wall mount seal

CODE COMPLIANCE

- UL Listed for Wet Locations
- IP66 Rated
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- Rated for Class 1, Div 2, Groups A, B, C, D

WARRANTY

- 5 Year




HLRM-B LED Hazardous Location Emergency Unit

ORDERING INFORMATION

CATALOG#	Description
HLRM-B-6V15	6V, 15W - NiCad Battery
HLRM-B-12V15	12V, 15W - NiCad Battery

OPTIONS (Factory Installed)

SD	- Self Diagnostics
TPS	- Tamper Proof Screws
CW	- Cold Weather

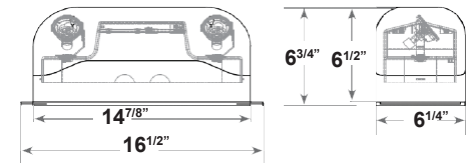

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
HLRM-B-6V	13.6	16.9	0.12	0.06
HLRM-B-12V	12.5	15.1	0.11	0.06

SPACING GUIDELINES

Model #	Mounting Height (ft)	3' Wide Egress Path		6' Wide Egress Path		Lumens per Head	Head Qty
		Single Unit (ft)	Unit to Unit (ft)	Single Unit (ft)	Unit to Unit (ft)		
HLRM-B	7.5' Mounting	38'	40'	34'	35'	219	2
	10' Mounting	36'	38'	34'	35'		
	15' Mounting	24'	6'	22'	25'		