



Project

Type

Catalog Number

SPECIFICATIONS

EMERGENCY

HOUSING

- Injection molded, high-impact vandal resistant polycarbonate
- Fully gasketed lens and vandal resistant latch clips
- Available in gray, white, or black finishes

ELECTRICAL

- Dual 120-277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 40°C (32°F - 104°F)

BATTERY

- 6V Sealed lead calcium battery
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- 120 Minute NiMH battery available

ILLUMINATION

- 5W MR16 LED lamp heads standard (466 Lumens/head)
- 5000K

MOUNTING

- Universal knockout pattern on back plate for surface mount
- Suitable for wall or ceiling mount

CODE COMPLIANCE

- cCSAus Listed for Wet Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- IP65 Rated
- Sanitation Approved
- Meets NSF Requirements
- BAA Compliant

WARRANTY

- 5 Year

ORDERING INFORMATION

CATALOG#
OEM-3-10W

OPTIONS (Factory Installed)


SD	- Self Diagnostics (10 minute time delay standard)
EM2	- 120 Minute Emergency Battery (90 minutes standard)
BLK	- Black Housing (gray standard)
WH	- White Housing (gray standard)
CS	- 120V Cordset

ACCESSORIES (Order Separately, Ships on Side)


WG15	- Wireguard
------	-------------



**OEM-3
Wet Location
Emergency Unit**

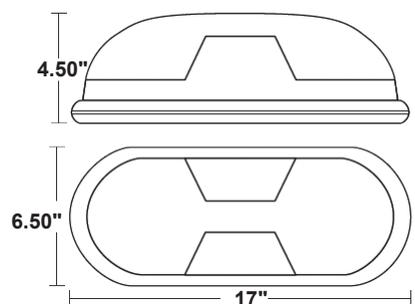


SPACING GUIDELINES

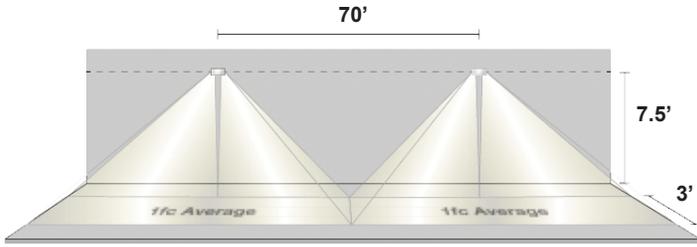

OEM-LED Wall Mount

Meets NFPA 101 Requirements for: 70' center-to-center spacing
3' path of egress - 7¹/₂' mounting height

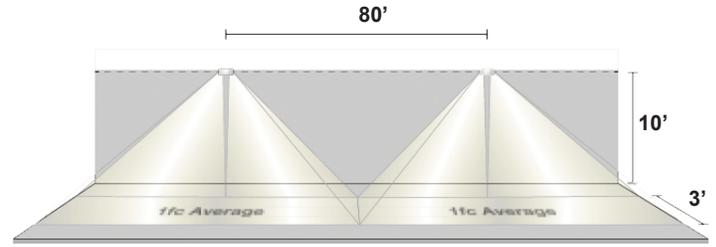

OEM-LED Ceiling Mount

Meets NFPA 101 Requirements for: 80' center-to-center spacing
3' path of egress - 10' mounting height