

SPECIFICATIONS

EMERGENCY

HOUSING

- Compact aluminum housing
- Available in white, black, or satin bronze finishes

ELECTRICAL

- Universal 120-277V
- Standard Operating Temperature: -20°C - 40°C (-4°F - 104°F)
- Cold Weather Temperature: -40°C

BATTERY

- 3.6V, 5Ah Li-SOCI2 battery
- LVD prevents battery from deep discharge
- Internal transfer switch automatically connects battery to lamp heads for 90-minute emergency illumination
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

ILLUMINATION

- Molded polycarbonate lens
- 50,000 Hours

MOUNTING

- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- cETLus Listed for Wet Locations
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes
- BAA Compliant

WARRANTY

- 5 Year



OWEL
Outdoor LED AC/EM Unit



ORDERING INFORMATION

CATALOG#	Description
OWEL-4W-*	4W, 175 Lumens, AC Only
OWEL-7W-*	7W, 221 Lumens, AC Only
OWEL-7W-EM-*	7W, 295 Lumens, Battery Backup
OWEL-10W-EM-*	10W, 481 Lumens, Battery Backup


*Specify Color; **WH-White**; **BZ-Bronze**; **BK-Black**

OPTIONS (Factory Installed)

SD	- Self Diagnostics (EM Models Only)
PC	- PhotoCell Lighting Control (EM-SD Models Only)
CW	- Cold Weather -40°C (EM Models Only)
TD	- Time Delay (20 Minutes)
SW120	- Security Lighting with Control Switch-120V (Standard EM Models)
SW277	- Security Lighting with Control Switch-277V (Standard EM Models)
SW-SD	- Security Lighting with Control Switch for EM-SD Units (120/277V)
2AC	- Dual AC Switch
FC	- 90° Cutoff
CC	- Custom Color

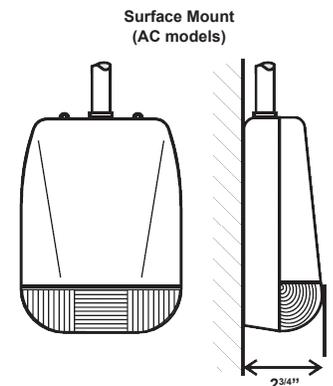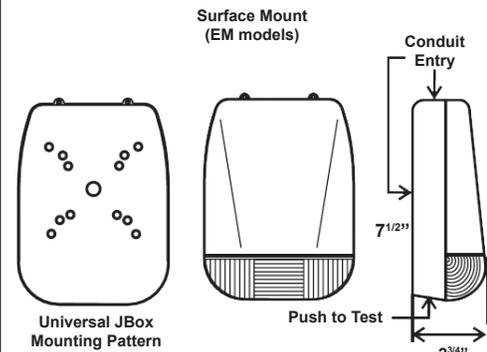

SPACING GUIDELINES

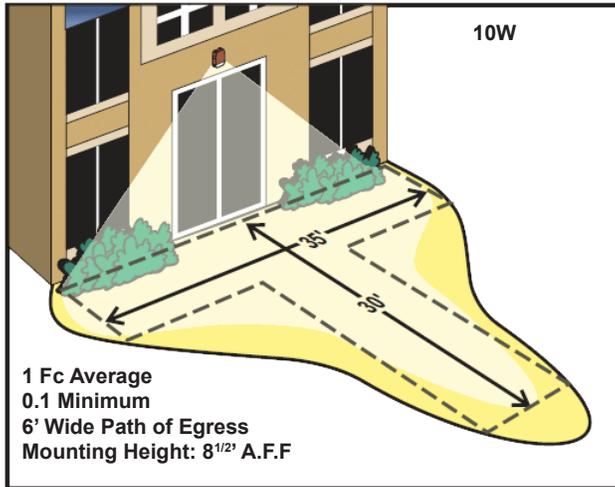

SELF DIAGNOSTICS

STATUS	LED DISPLAY
NORMAL FULL CHARGE	● GREEN ON
NORMAL FAST CHARGE	● ORANGE ON
FAILED BATTERY	●● RED FLASH FAST
FAILED LAMP	●● GREEN FLASH
FAILED TRANSFER	●● ORANGE FLASH
FAILED CHARGER	●● RED FLASH SLOW