

**SPECIFICATIONS**

**EXITS**

**HOUSING**

- 20-gauge steel housing
- Available in white or black finishes
- Field selectable knockout chevron directional indicators
- Unit provided standard with single and double faces for universal application

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs

**BATTERY**

- 4.8V Maintenance-free, rechargeable NiCad battery (EM models)
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

**MOUNTING**

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

**CODE COMPLIANCE**

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified

**WARRANTY**

- 5 Year




**STXE**  
**Steel LED Exit**

**ORDERING INFORMATION**

MODEL#	# Faces	Letter	Housing
STXE	2	R (Red)	B (Black)
		G (Green)	W (White)

**OPTIONS (Factory Installed)**

EM	- NiCad Battery
SD	- Self Diagnostics (requires EM)

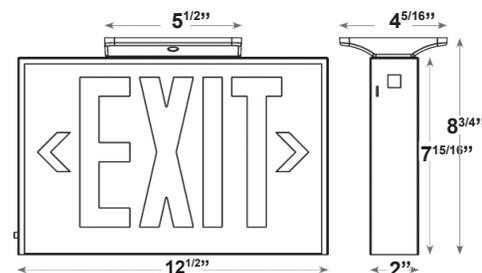

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
STXE	3.8	3.8	0.034	0.020