



Project

Type

Catalog Number

**SPECIFICATIONS**

EXIT

**HOUSING**

- Injection-molded high-impact resistant thermoplastic
- Available in white or black housings
- EZ snap out chevron directional indicators

**ELECTRICAL**

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

**ILLUMINATION**

- Ultra bright, energy efficient red or green LEDs
- 3.1W Led light strip (147 Lumens/head)
- Smooth chrome-plated reflector and acrylic lens

**BATTERY**

- 3.6V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board and light strip for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours
- Bi-color LED indicator alerts to battery condition (Green-normal, Red-check battery)

**MOUNTING**

- Universal knockout pattern on back plate for wall mount

**CODE COMPLIANCE**

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- Suitable to use in Floor Proximity installation

**WARRANTY**


- 5 Year



**XCLL  
Low Level Combo**

**ORDERING INFORMATION**

CATALOG#	Description
XCLL1RW	Single Face, Red on White
XCLL1RB	Single Face, Red on Black
XCLL1GW	Single Face, Green on White
XCLL1GB	Single Face, Green on Black

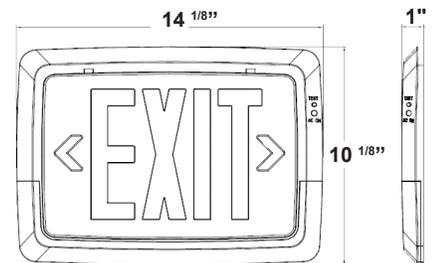

## ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XCLL	1.2	1.2	0.092	0.092