

SPECIFICATIONS

EXITS

HOUSING

- Injection-molded high-impact resistant thermoplastic with a curved face and rounded corners
- Available in white or black housings
- EZ snap out chevron directional indicators
- Unit comes standard single face with an extra face plate for double face applications

ELECTRICAL

- Dual 120/277V
- Charge rate/power "On" LED light and push-to-test switch for testing
- Standard Operating Temperature: 0°C - 50°C (32°F - 122°F)

ILLUMINATION

- Ultra bright, energy efficient red or green LEDs

BATTERY

- 1.2V Maintenance-free, rechargeable NiCad battery
- Internal transfer switch automatically connects battery to LED board for 90-minute emergency illumination
- LVD (Low Voltage Disconnect) prevents battery from deep discharge
- Two-rate charger initiates battery charge to recharge in battery in 24 hours

MOUNTING

- Mounting canopy included for top or end mount
- Universal knockout pattern on back plate for wall mount

CODE COMPLIANCE

- UL Listed for Damp Locations
- Meets UL924, NFPA101, NEC, OSHA, Local and State Codes
- CEC Title20 Certified
- Assembled in America (Optional)

WARRANTY

- 5 Year




**XES
Compact
Thermoplastic Exit**

ORDERING INFORMATION

MODEL#	Face#	Letter	Housing
XES	2 (Universal)	R (Red)	W (White)
		G (Green)	B (Black)
		RG (Selectable)	

Options (Factory Installed)

EM	- NiCad Battery
SD	- Self Diagnostics (requires EM)
SWXE	- Special Wording (prefix to part number)
USA	- Assembled in America

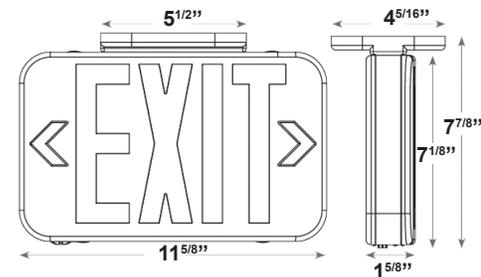

ELECTRICAL INFORMATION

Catalog #	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
XES AC/EM	1.0	1.0	0.09	0.09
XES2R-EM-SD	2.5	2.5	0.05	0.05
XES2G-EM-SD	2.7	2.7	0.05	0.05