



# INSTALLATION INSTRUCTIONS AND OWNER'S MANUAL

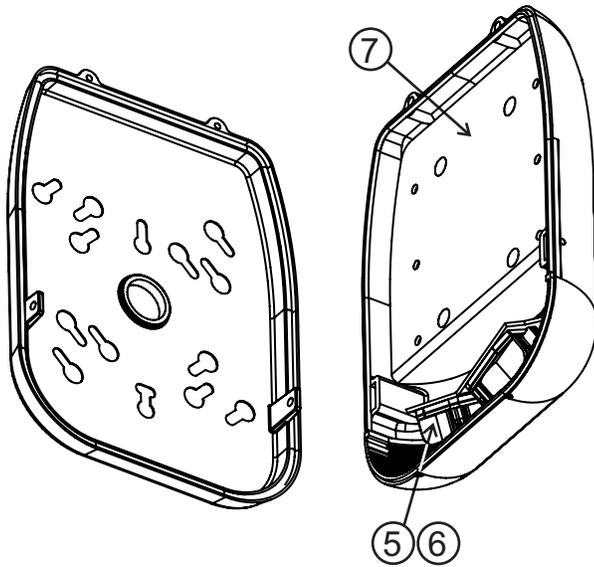

ITEM	QTY	P/N	DESCRIPTION
1	1	343100-X	HSG ASSBY 2 LAMP-'X' COLOR
2	1	343002-X	HSG ASSBY 3 LAMP-'X' COLOR
3	1	586104	LENS
4	1	586103-X	BASE- REMOTE-'X' COLOR
5	1	343005	LED 2- LAMP ASSBY KIT
6	1	343006	LED 3- LAMP ASSBY KIT
7	1	SEE SPEC	POWER SUPPLY ASSBY
8	1	343035	WALL GASKET

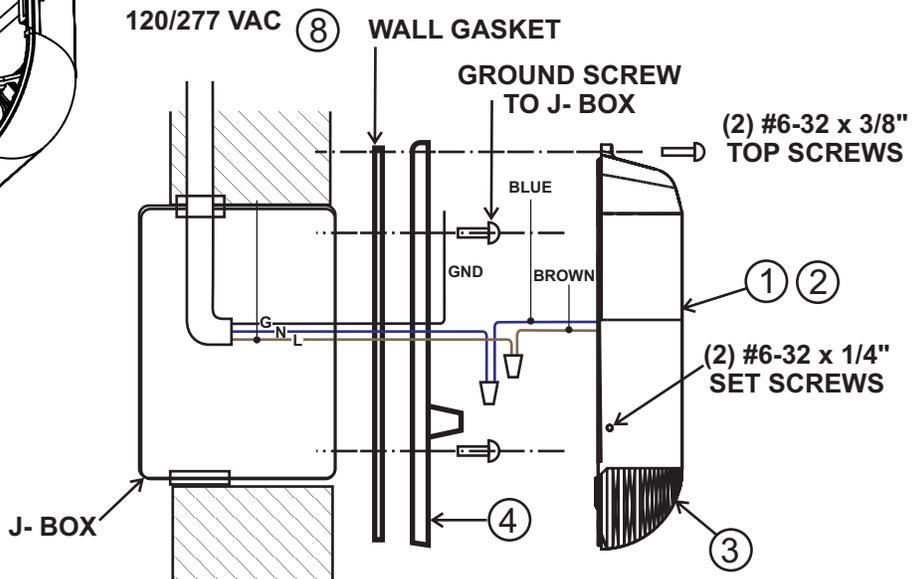

Product is supplied assembled. To separate Housing and Base, remove two #6-32 screws at top of housing and back out two #6-32 set screws on each side.

1. Route AC input wiring through wall gasket and base. Connect ground wire around one of the base mount screws. Insert gasket and mount base to standard j-box.
2. Connect the AC input wires in fixture to supply with standard wire nuts.  
BROWN: LINE (120/ 277 VAC)  
BLUE: NEUTRAL  
GREEN: GROUND
3. Place Housing in position on Base. Tighten set screws on both sides, and #6-32 screws at top of housing, using light pressure. Apply firm hand pressure to top of Housing to compress gasket, then firmly tighten screws.

### IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Disconnect AC power before servicing.
2. Refer to wiring diagram for proper connections.
3. All servicing should be performed by qualified personnel.
4. Consult your local building code for approved wiring and installation.
5. Do not use this equipment for other than intended use.
6. Do not let power cords touch hot surfaces.
7. Mount and secure the fixture at a location and height to avoid ready access and tampering by unauthorized persons.
8. The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.
9. Suitable for wet locations. See product label for temperature limitations.

**SAVE THESE INSTRUCTIONS**